


CHAINLINK FENCE REQUIREMENT

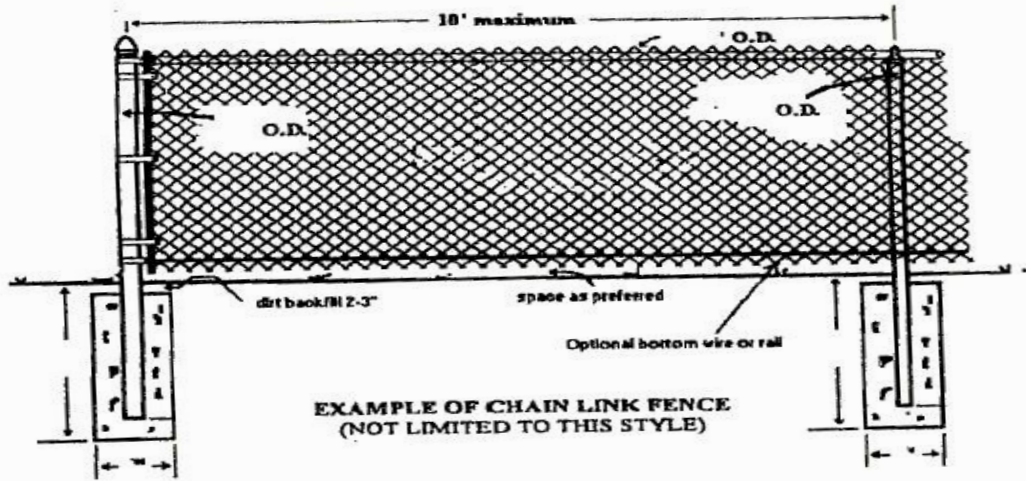

2224.1 CHAIN LINK FENCES IN EXCESS OF 12FT. IN HEIGHT SHALL BE DESIGNED ACCORDING TO THE LOADS SPECIFIED IN CHAPTER 16 (HIGH VELOCITY HURRICANE ZONES).

2224.2 CHAIN LINK FENCES LESS THAN 12FT. IN HEIGHT SHALL BE DESIGNED ACCORDING TO THE LOADS SPECIFIED IN CHAPTER 16 (HIGH VELOCITY HURRICANE ZONES) OR MAY BE CONSTRUCTED TO MEET THE MINIMUM REQUIREMENTS SPECIFIED IN TABLE 2224 BELOW

**TABLE 2224
CHAIN LINK FENCE MINIMUM REQUIREMENTS**

FENCE HEIGHT	TERMINAL POST DIMENSIONS (o.d. x wall thickness)	LINE POST DIMENSIONS (o.d. x wall thickness)	TERMINAL POST CONCRETE FOUNDATION SIZE (Diameter x Depth)	LINE POST CONCRETE FOUNDATION SIZE (Diameter x Depth)
UP TO 4'	2-3/8" X .042"	1-5/8 X .047"	10" X 24"	8" X 24"
OVER 4' TO 5'	2-3/8" X .042"	1-7/8 X .055"	10" X 24"	8" X 24"
OVER 5' TO 6'	2-3/8" X .042"	1-7/8 X .065"	10" X 24"	8" X 24"
OVER 6' TO 8'	2-3/8" X .110"	2-3/8 X .095"	10" X 36"	10" X 36"
OVER 8' TO 10'	2-7/8" X .110"	2-3/8 X .130"	12" X 40"	10" X 40"
OVER 10' TO 12'	2-7/8" X .160"	2-7/8 X .120"	12" X 42"	12" X 42"

NOTES:

1. This Table is only applicable to fences with unrestricted air flow.
2. Fabric - 12-1/2 Gauge minimum.
3. Tension Bands - Use one less than the height of the fence in feet, evenly spaced.
4. Fabric Ties - Must be the same gauge as the gauge of the fabric, minimum.
5. Fabric Tie Spacing on the Top Rail - Five ties between posts, evenly spaced.
6. Fabric Tie Spacing on Line Posts - One less than the height of the fence in feet, evenly spaced.
7. Either Top Rail or Top Tension Wire shall be used.
8. Braces must be used at Terminal Posts if top tension wire is used instead of Top Rail.
9. Post Spacing - 10' on center maximum
10. Posts shall embed to within 6" of the bottom of the foundation.
11. In order to follow the contour of the land, the bottom of the fence may clear the contour of the ground by up to 6" without increasing Table values to the next higher limit.